

Lanthanum-Modified Activated Alumina for Selective Removal of Fluoride from Phosphogypsum Leachate

Shuomin Hou ¹, Zhaobo Wang ^{1,*}, Xiang Peng ^{2,*}, Shengchao Huang ³,
Huijuan Ma ³ and Ruan Chi ^{1,4}

¹ Phosphogypsum Utilization R&D Center, Hubei Three Gorges Laboratory, Yichang 443007, China; houshuomin@hbsxsys.com (S.H.); rac@wit.edu.cn (R.C.)

² State Key Laboratory of Green and Efficient Development of Phosphorus Resources, Hubei Key Laboratory of Plasma Chemistry and Advanced Materials, Wuhan Institute of Technology, Wuhan 430205, China

³ Hubei Xingfa Chemicals Group Co., Ltd., Yichang 443007, China; huangshengchao@xfjt.com (S.H.); MHJ19831225@163.com (H.M.)

⁴ School of Resources and Safety Engineering, Wuhan Institute of Technology, Wuhan 430073, China

* Corresponding author. E-mail: wangzhaobo@hbsxsys.com (Z.W.); xpeng@wit.edu.cn (X.P.)

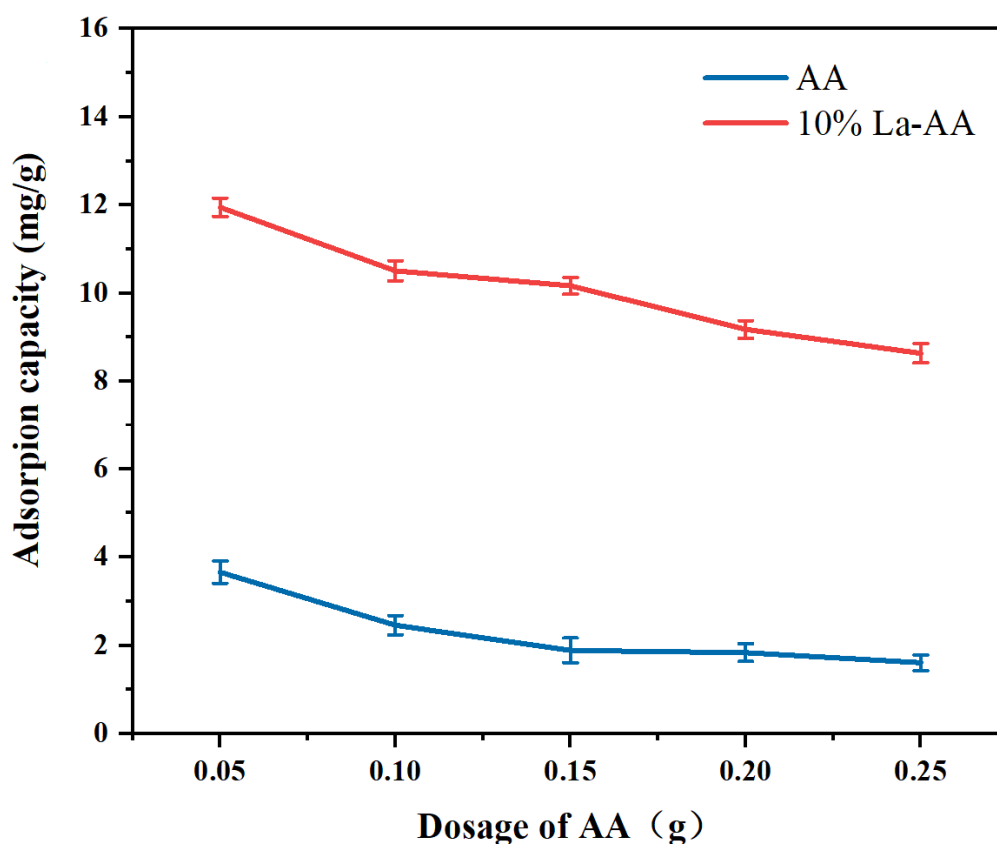


Figure S1. Effects of dosage of AA and 10% La-AA on the fluoride ion adsorption.

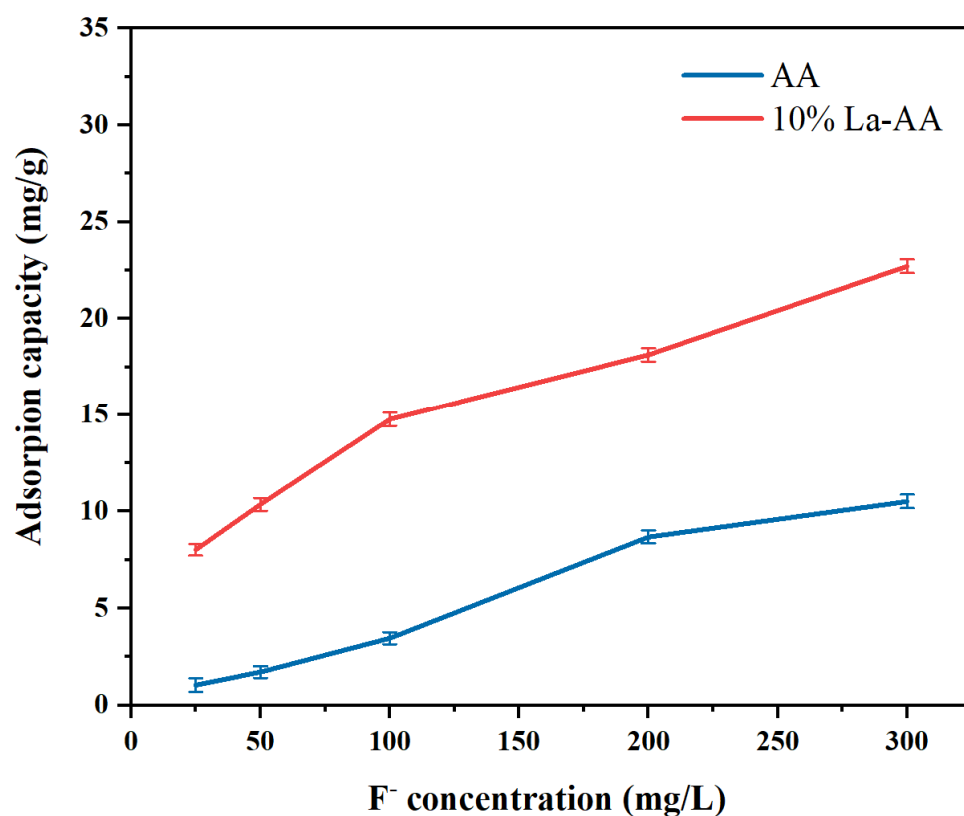


Figure S2. Effects of concentration of F⁻ on the fluoride ion adsorption.

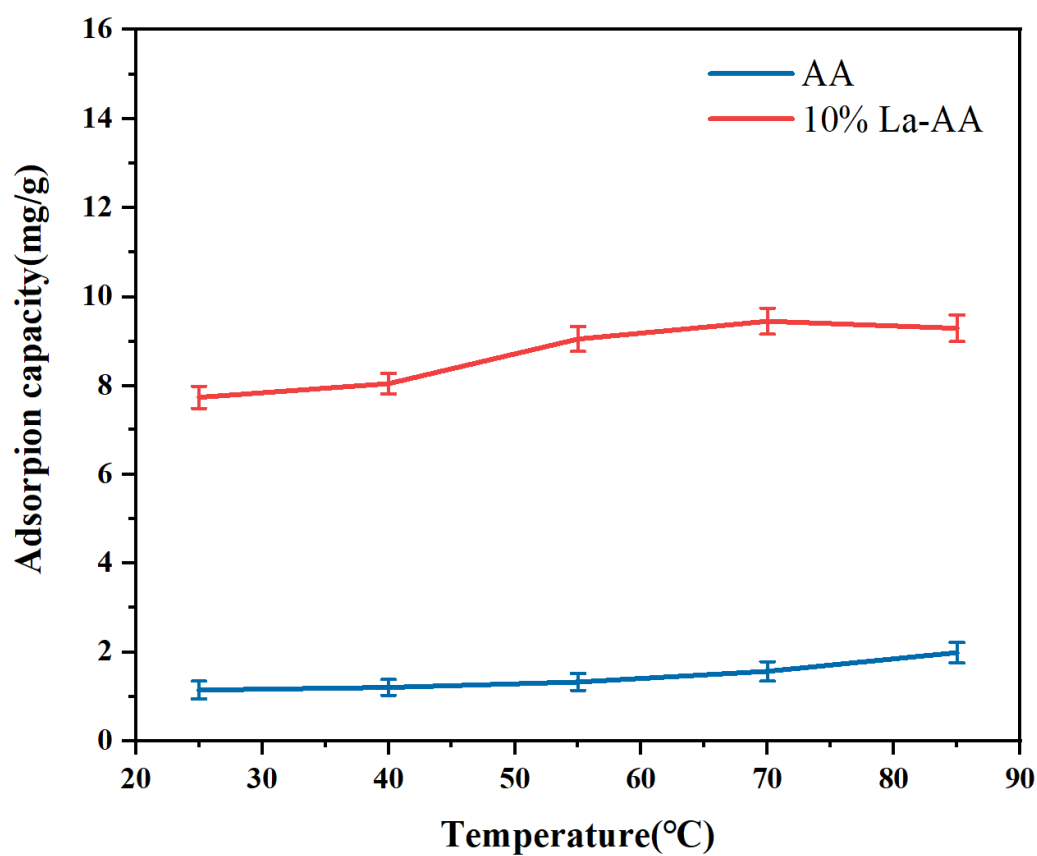


Figure S3. Effects of temperature on the fluoride ion adsorption.

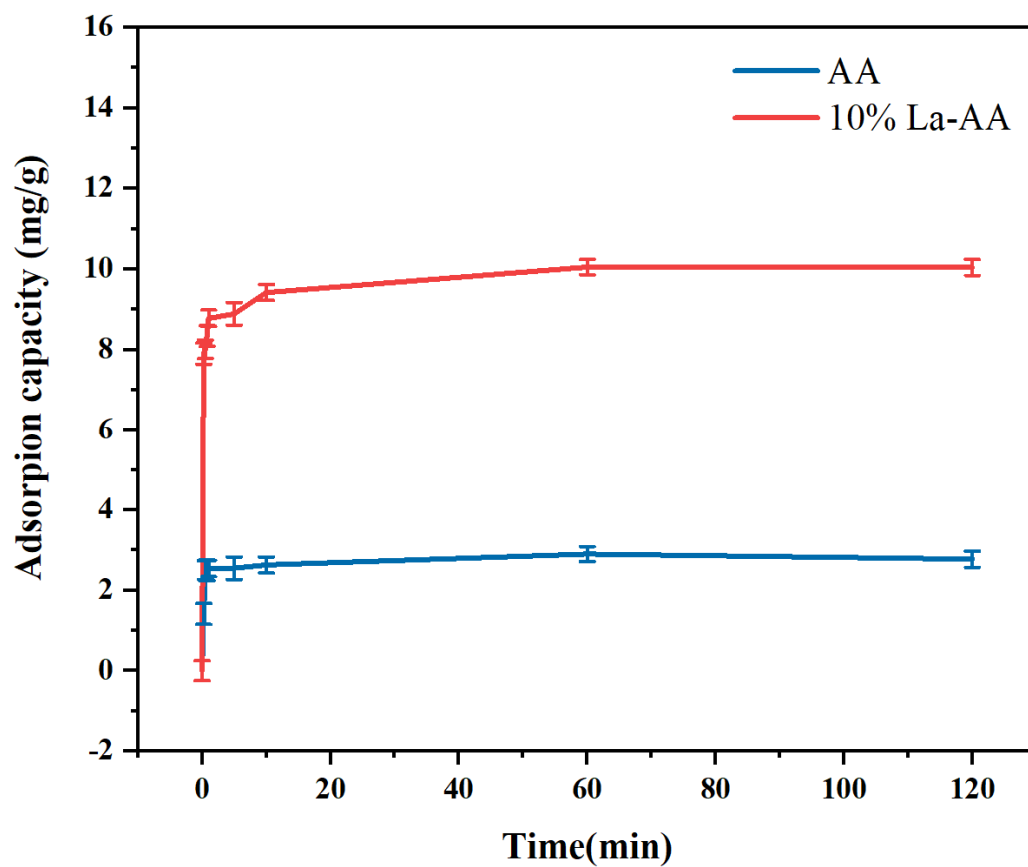


Figure S4. Effects of adsorption time on the fluoride ion adsorption.